

MODEL 220-312

AIRSTREAM ECO AUTOMATIC HAND DRYER

Option:

220-312-MB Matte Black Finish

www.bradleyaustralia.com



PRODUCT FEATURES:

- Satin stainless steel finish
- Intelligent sensor
- Wall mounted
- 240V, 800W, 3.6A
- Ideal for mid to high volume public washrooms

Overall Dimensions 228mm W x 278mm H x 154mm D

PRODUCT DATA:

CONSTRUCTION:

OUTER CASE: Manufactured of type 304 stainless steel, 2mm thick,

featuring vandal resistant key.

MOTOR: Brushless high efficiency with low power consumption.

ELECTRICAL SPECIFICATIONS:

ELECTRICAL SUPPLY: 240V / 50Hz / 3.6A

RATED POWER: 800W
AIR VOLUME: 75m³/h
AIR VELOCITY: 85m/sec
NOISE LEVEL: >70db
NETT WEIGHT: 3.3kg
PROTECTION CATEGORY: IP 22

RECOMMENDED INSTALLATION HEIGHT:

Men's Washroom1200mmWomen's Washroom1150mmChildren's Washroom (ages 11-15)1110mmChildren's Washroom (ages 5-10)850mmAccessible Bathroom1000mm

OPERATION:


Activation by infra-red (touch free) sensor. The intelligent sensor alters the temperature of the output airflow to suit the installation environment. This is an adjustable feature to be amended by a certified electrician. Round nozzle for concentrated air flow and quick drying process. Automatically adjusts heating power for energy conservation.


INSTALLATION:

Requires 10 amp power supply. Secure to wall through back-plate with mounting screws provided.

GUIDE SPECIFICATION:

Surface mounted automatic hand dryer shall be fabricated of type 304 stainless steel, 2mm thick, featuring vandal-resistant key and concealed nozzle. Motor long-life energy saver. Low noise, high air flow speed. 10 to 15 seconds drying time.

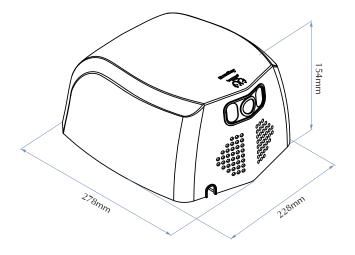

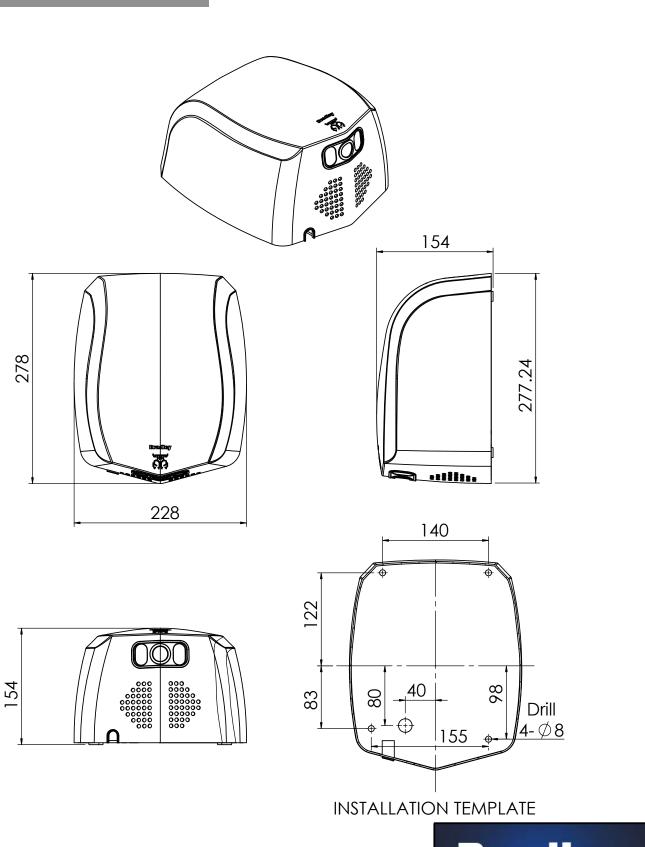

Bradley

customised excellence

DWG NO.

220-312

APPROVED BY:

Proudly customised design please approve SCALE:1:5